

# LIFELINE FOR STEEL DECK FLAT ROOFING



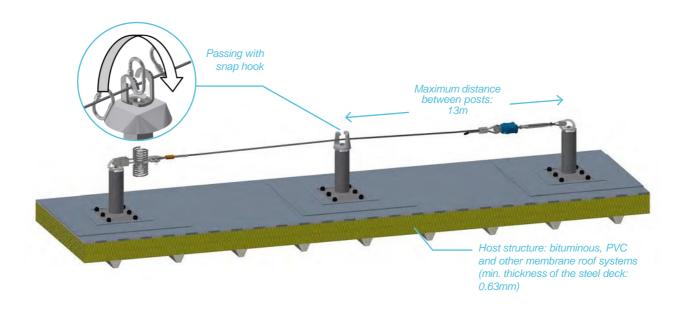


## Fixing

- Drilling of two
  Ø25mm holes
  through the roof
- Fixing of the counter plate with 2 gravity toggles
- Welding of an extra layer of membrane over the counter
- Waterproofing assured by EPDM washers
- Max. thickness of the system: 180mm



# **Dimensions**



Absorber post

Counter plate

#### Accessories



Stainless steel Intermediate device



Tensor + Pre-adjustor



Stainless steel cable Ø8



Device for manual crimping



Energy absorber



Corner device

## **Option**



Distant passing of the intermediate posts with shuttle and adapted intermediate devices



Stainless steel shuttle

