


Fixing



- Drilling of 4 Ø25 mm holes
- Fixing with 4 gravity toggles
- Waterproofing assured by EPDM washers

Dimensions

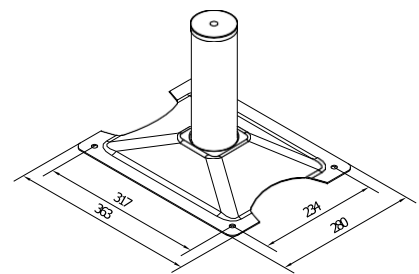

Absorber post

Accessories




Stainless steel Intermediate device



Stainless steel cable Ø8



Energy absorber



Distant passing of the intermediate posts with shuttle and adapted intermediate devices



Tensor + Pre-adjustor



Device for manual crimping



Corner device



Stainless steel shuttle